



"Out Shines All Others"

PULSABLE IR SOURCE

Model EP-3962*

Helioworks, Inc. offers a unique pulsable infrared emitter with a tungsten filament that provides mid IR radiation to over 5 microns. It operates in pulsed or steady state mode at temperatures in excess of 1900° K in an industry standard TO-8 package.




Key Features Include:

- Tungsten Filament
- Can Be Operated in Pulsed or Steady State Mode
- Internal Gold Plated Parabolic Reflector
- Sapphire Window
- Standard TO-8 Package

Electrical Specifications:


Peak Voltage = 2.6 Volts DC MAXIMUM
 Peak Current = 1.05 Amps
 Peak Power = 2.7 Watts

Current vs Voltage

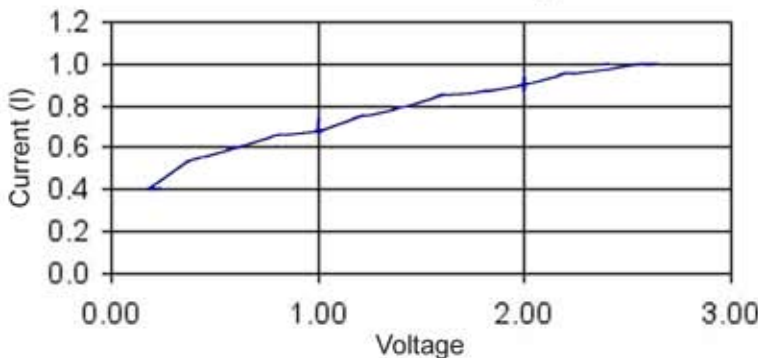


Modulation vs. Frequency

(50% Duty Cycle)

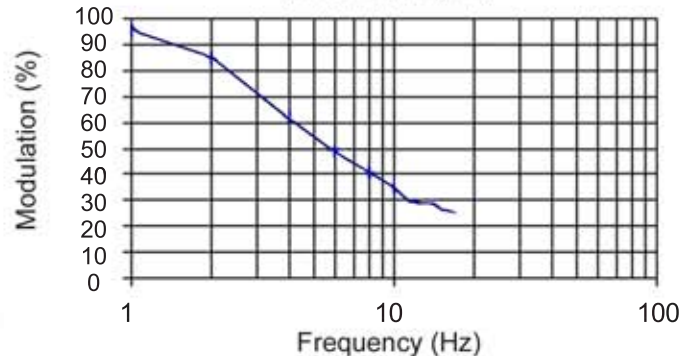

Average Radiant Intensity (Watts/CM2):

Volts = 2.6, Distance = 3.0 inches from source

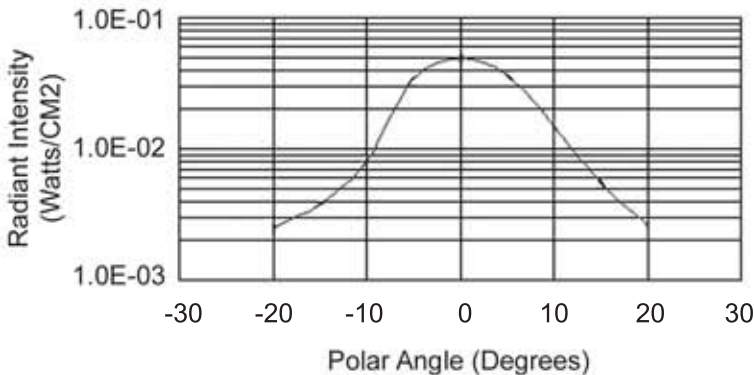

Polar Angle	Average (W/CM2)
-20	2.50E-03
-15	3.80E-03
-10	8.00E-03
-5	3.30E-02
0	4.95E-02
5	3.60E-02
10	1.50E-02
15	5.60E-03
20	2.70E-03